



Test Report: DDR-60G-15

60W DIN Rail Type DC-DC Converter

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1:13.5 V~16.5 V	I/P : 24 VDC O/P : MIN LOAD Ta : 25°C	13.18V~16.95V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: -2%~ 2%	I/P:9 VDC / 36VDC O/P:FULL/ MIN. LOAD Ta:25°C	V1:-0.30%~ 0.21%
3	LINE REGULATION (Max)	V1:-0.5%~ 0.5%	I/P: 9VDC /36VDC O/P:FULL LOAD Ta:25°C	V1:- 0.01 %~0 %
4	LOAD REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 24VDC O/P:FULL ~MIN LOAD Ta:25°C	V1:-0.3%~ 0.21%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P:24VDC O/P:FULL LOAD Ta:25°C	TEST:3.4%
6	RIPPLE & NOISE (Max)	V1: 75 mVp-p	I/P: 24VDC O/P:FULL LOAD Ta:25°C	V1: 45 mVp-p

high frequency :




low frequency :

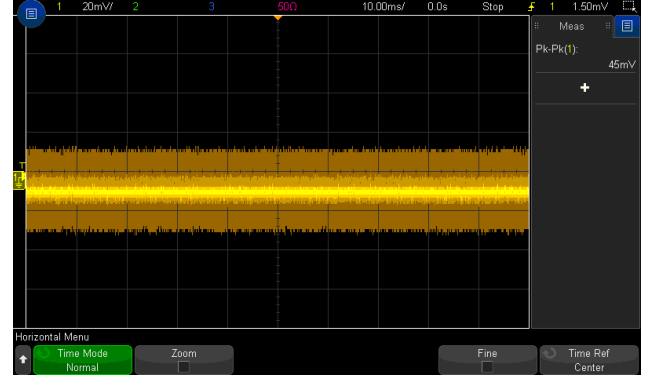





7	SET UP TIME (Max)	24VDC/120 ms	I/P:24 VDC O/P:FULL LOAD Ta:25°C	24VDC/ 35 ms
---	-------------------	--------------	--	--------------

INPUT=24VDC @ FULL LOAD

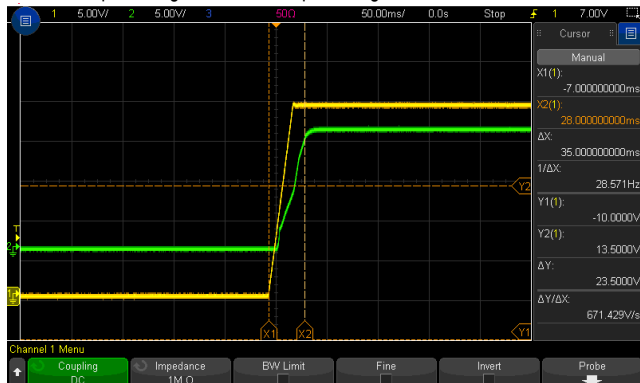CH1 : DC Input Voltage CH2 : DC Output Voltage

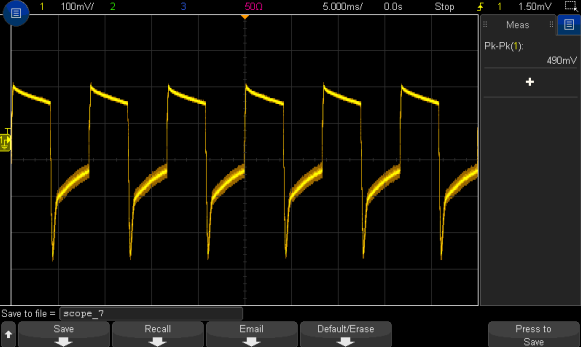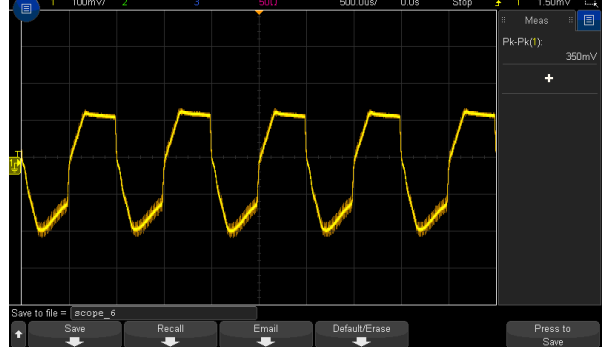


8	RISE TIME (Max)	24VDC/ 85 ms	I/P: 24 VDC O/P:FULL LOAD Ta:25°C	24VDC/ 23.26 ms
<p>INPUT=24VDC@ FULL LOAD</p> 				
9	HOLD UP TIME (TYP)	24VDC/5ms	I/P: 24VDC O/P:FULL LOAD Ta:25°C	24VDC/5.20ms
<p>INPUT=24VDC @ FULL LOAD CH1 : DC Input Voltage CH2 : DC Output Voltage</p> 				
10	DYNAMIC LOAD	V1: 1500 mVp-p	I/P: 24VDC O/P: (1)FULL /MIN LOAD 50%DUTY / 120HZ (2)FULL /MIN LOAD 50%DUTY / 1KHZ Ta:25°C	490mVp-p 350mVp-p
<p>FULL /MIN LOAD 50%DUTY / 120HZ</p> 		<p>FULL /MIN LOAD 50%DUTY / 1KHZ</p> 		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
----	-----------	---------------	----------------	--------

1	INPUT VOLTAGE RANGE	9VDC~ 36VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	7.92V~ 36V
			I/P: LOW-LINE-0.2=8.8V HIGH-LINE+3V=39V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT CURRENT(TYP)	24VDC/3 A	I/P: 24VDC O/P:FULL LOAD Ta:25°C	I=2.71A/24VDC
3	EFFICIENCY(TYP)	91 %	I/P: 24VDC O/P:FULL LOAD Ta:25°C	92.1%


EFFICIENCY vs LOAD

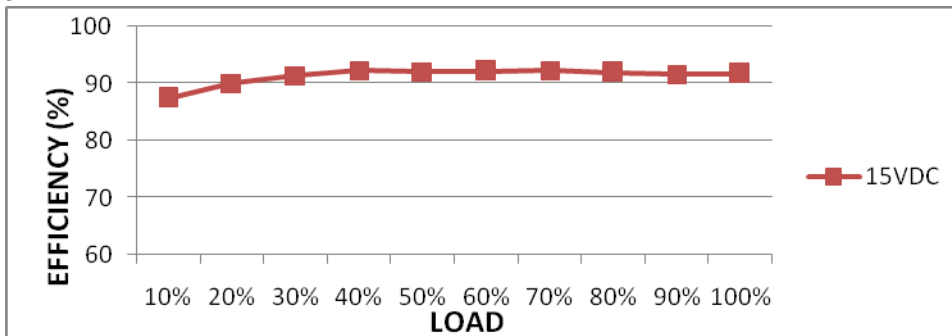

4	INRUSH CURRENT(TYP)	24VDC/ 20 A COLD START	I/P: 24VDC O/P:FULL LOAD Ta:25°C	I=8.4A/ 24VDC
---	---------------------	---------------------------	--	---------------

INPUT=24VDC @ FULL LOAD

CH4 : Input current

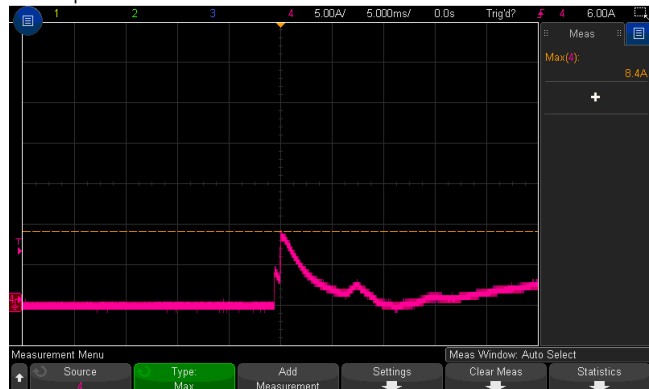

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~135%RATED OUTPUT POWER	I/P: 36VDC I/P: 24 VDC I/P: 9 VDC O/P:TESTING Ta:25°C	121.8%/ 36VDC 122.2%/ 24VDC 123.2%/9VDC PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

2	OVER VOLTAGE PROTECTION	CH:17.25 V~20.25 V	I/P: 36VDC I/P: 24 VDC I/P: 9 VDC O/P:MIN LOAD Ta:25°C	19.0V/36VDC 19.0V/ 24VDC 19.0V/ 9VDC PROTECTION TYPE : Shut down O/P voltage,re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 36VDC O/P: FULL LOAD Ta:25°C	OK PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed
4	INPUT REVERSE	POWER OK	I/P:36VDC O/P: NO LOAD Ta:25°C	NO DAMAGE

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 3 Rated : 100 V	I/P:High-Line +3V =39V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)full load continue Ta:25°C	VDS: (1)80.1V (2)82.5V (3)79.3V
2	Diode Peak Voltage	Q100 Rated :150 V	I/P:High-Line +3V =39 V DC ON/OFF O/P: (1)Full Load (2)Output Short (3) full load continue Ta:25°C	Q100: VDS: (1)124V (2)104V (3)126V
3	Input Capacitor Voltage	C5 Rated: : 1200 μ / 50V	I/P:High-Line +3V =39 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	C5 (1)41.6V (2)41.2V (3)41.6V (4)41.6V
4	Control IC Voltage Test	PWM IC U1 Rated 9V~20V U100 Rated -0.3V~38V	I/P:High-Line +3V =39 V DC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	U1 (1) 11.4V (2) 11.6V (3) 11.8V (4) 11.6V U100 (1)18.2V (2)17.0V (3)18.2V (4)16.8V
5	Clamp Diode Peak Voltage	D4 Rated : 600V	I/P : High-Line +3V =39 V DC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	D4 (1)47.1V (2)46.3V



SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	EN 60950-1 I/P-O/P:4 KVDC/min	I/P-O/P: 4.4 KVDC/min Ta:25°C	I/P-O/P: 0μA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	<input checked="" type="checkbox"/> EN55032 <input type="checkbox"/> EN55011 <input checked="" type="checkbox"/> CLASS A <input type="checkbox"/> CLASS B	I/P: 24VDC O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL Test by certified Lab
2	CONDUCTION	<input checked="" type="checkbox"/> EN55032 <input type="checkbox"/> EN55011 <input checked="" type="checkbox"/> CLASS A <input type="checkbox"/> CLASS B	I/P: 24VDC O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL Test by certified Lab
3	E.S.D	EN61000-4-2 <input type="checkbox"/> Din rail Model : AIR: 8KV / Contact: 6KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
4	E.F.T	EN61000-4-4 <input type="checkbox"/> INDUSTRY INPUT: 2KV	I/P: 24 VDC O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
5	SURGE	IEC61000-4-5 <input type="checkbox"/> INDUSTRY line-line :1KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
6	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : DDR-60G-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 24VDC O/P : FULL LOAD Ta= 27.3 °C 2. HIGH AMBIENT BURN-IN : 1 HRS I/P : 24VDC O/P : FULL LOAD Ta= 60.8 °C		



				ROOM AMBIENT Ta=27.3 °C	HIGH AMBIENT Ta=60.8 °C
		NO	Position		
		1	LF1	54.9°C	85.3°C
		2	C5	60.3°C	94.3°C
		3	T1	68.2°C	100.8°C
		4	Q3	68.3°C	107.4°C
		5	D4	70.5°C	107.0°C
		6	R9	68.9°C	104.1°C
		7	Q100	79.5°C	107.9°C
		8	C105	63.2°C	94.6°C
		9	C107	63.6°C	93.4°C
		10	C108	57.3°C	89.7°C
		11	U1	64.3°C	98.7°C
		12	ZNR1	44.1°C	77.4°C
		13	Q1	47.1°C	82.4°C
		14	RTH1	46.0°C	82.6°C
		15	L100	60.0°C	91.6°C
		16	C110	61.1°C	89.4°C
		17	C40	64.7°C	95.4°C
		18	Q2	57.4°C	88.8°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 24 VDC O/P : 118% LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 36 VDC/ 18 VDC O/P : 100 % LOAD Ta= -40 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE		I/P : 39 VDC O/P : FULL LOAD Ta=60 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~60°C)		I/P : 24 VDC O/P : FULL LOAD	±0.0041%(0~60°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC			TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 24VDC/Full Load DC ON/OFF TEST turn on 3sec ; turn off 1sec@15cycle\ 24VDC/Full Load DC ON@1cycle			TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C 2 Din Rail			TEST : OK
			Displacement	Acceleration	
		2 (+3/-0) Hz up to 15Hz	± 2.5mm	-----	
		15Hz up to 50Hz	-----	2.3g	
		Sweep rate	Max 1 Octave/minute		



60W DIN Rail Type DC-DC Converter

DDR-60G series

9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 24VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 24VDC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 24VDC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 24VDC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 245255.4 HRS (2) 25033.1 HRS (3) 47453.3 HRS (4) 86258 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 3261.6K hrs min. Telcordia SR-332 (Bellcore) ; 611.1K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above30,000 hours @ TA 60°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		wangdz

12.10.30 A50-F031