



Test Report: NPF-200-42

200W Constant Voltage+Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

■ DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 230 VAC I/P:115VAC O/P:FULL LOAD Ta:25°C LEDL MODE TEST	3.05~3.22%
2	CONSTANT CURRENT AND OUTPUT VOLTAGE REGION	CH1: 21V~ 42 V	I/P: 230 VAC O/P:FULL LOAD Ta:25°C LEDL MODE TEST	8.4V~42 V /230VAC
3	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~1 % (Max)	I/P:110 /305 VAC O/P:FULL~MIN LOAD Ta:25°C	V1: 0.45%~1.02%
4	LINE REGULATION	V1: -0.5% ~ 0.5% (Max)	I/P:110 /305 VAC O/P:FULL LOAD Ta:25°C	V1: 0%~ 0%
5	LOAD REGULATION	V1: -0.5% ~ 0.5% (Max)	I/P:110 /305 VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.07%~ 0.09 %
6	OVER/UNDERSHOOT TEST	< +5%	I/P:110 /305 VAC O/P:FULL LOAD Ta:25°C	TEST: 1.66 %
7	CURREN RIPPLE	V1: -5% ~ 5% (Max)	I/P:110VAC /305AC O/P:FULL/ MIN LOAD Ta:25°C	V1: 2.26 %~ 3.79 %
8	SET UP TIME (Max)	230VAC/500ms 115VAC/500ms	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C LEDL MODE TEST	230VAC/ 171ms 115 VAC/ 357ms

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

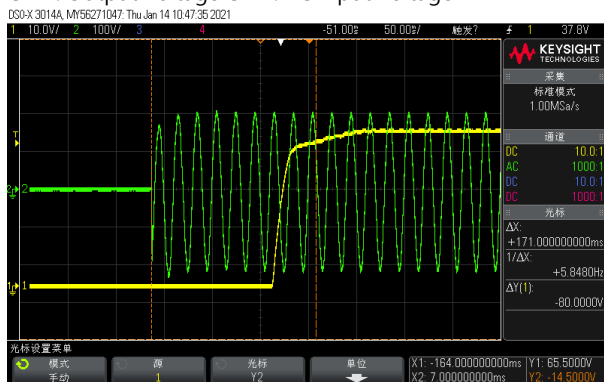


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

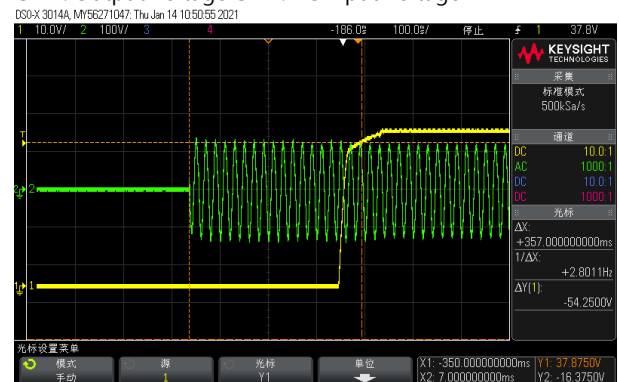


9	RISE TIME (Max)	230VAC/ 80ms for Blank type 115VAC/ 80ms for Blank type 230VAC/ 200ms for V type 115VAC/ 200ms for V type	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C LEDL MODE TEST	230VAC/ 40ms for Blank type 115 VAC/45ms for Blank type 230VAC/ 29.6ms for V type 115 VAC/ 26.4ms for V type
---	-----------------	--	---	---


INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage for Blank type

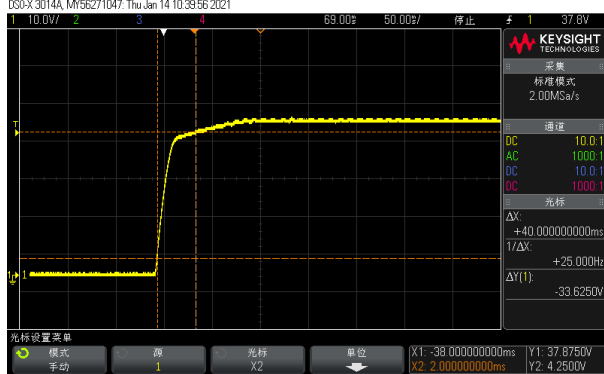


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage for Blank type

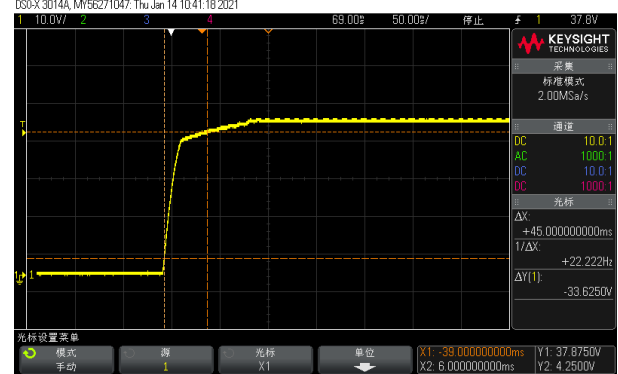

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage for V type

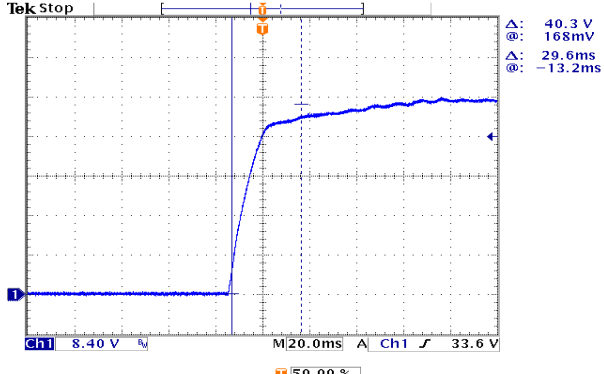


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage for V type

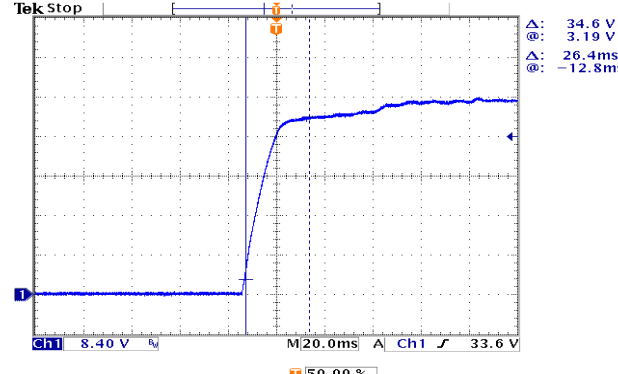






10	HOLD UP TIME (Max)	230VAC/10ms 115VAC/10ms	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C LEDL MODE TEST	230VAC/ 20.8ms 115 VAC/ 21ms
----	--------------------	----------------------------	---	---------------------------------

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage


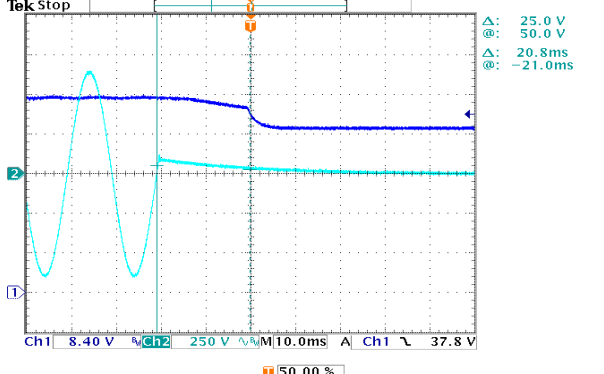


INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage


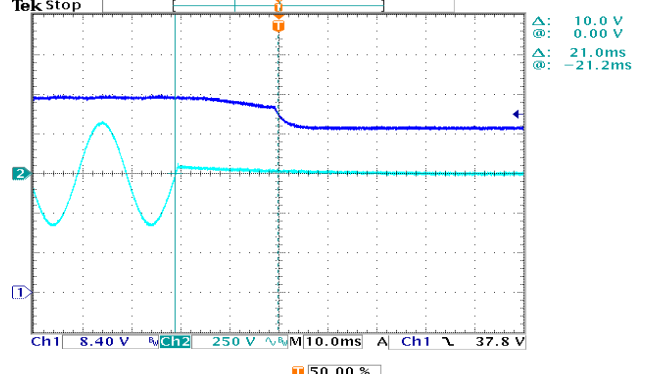


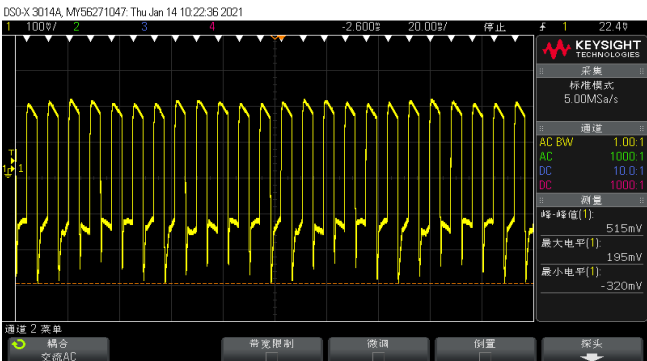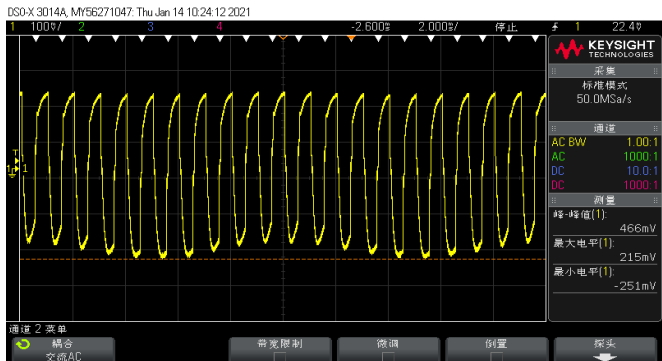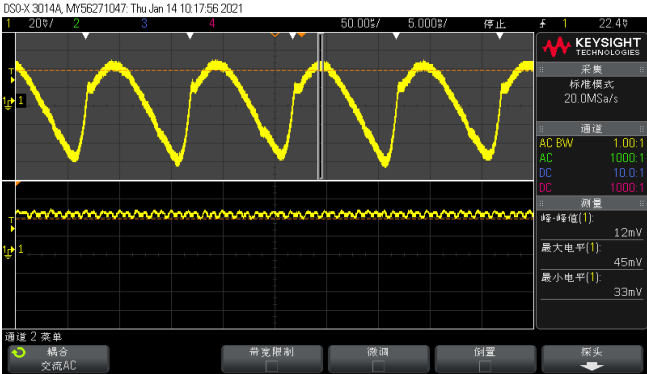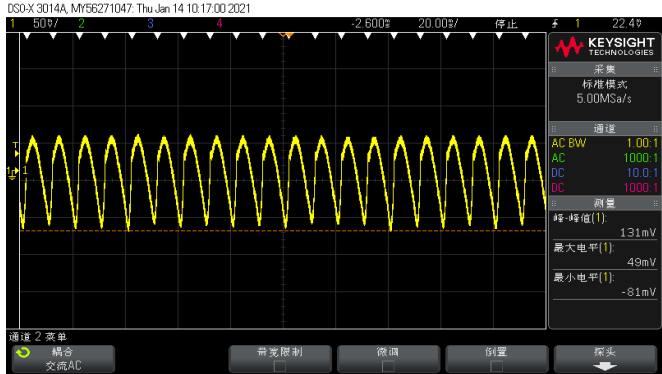11	DYNAMIC LOAD	V1: 4200mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	515mVp-p FULL /50% LOAD 50%DUTY / 120HZ 466mVp-p FULL /50% LOAD 50%DUTY / 1KHZ
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 		
12	RIPPLE & NOISE (Max)	V1: 250mVp-p	I/P: 230 VAC O/P:FULL LOAD Ta:25°C CCH MODE TEST	V1: 131mVp-p
<p>high frequency :</p> 		<p>low frequency :</p> 		
DIMMING OPERATION (for V-Type)	<p>※ 3 in 1 dimming function to adjust output voltage level</p> <ul style="list-style-type: none"> • Output constant voltage can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance. • Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers. • Dimming source current from power supply: 100μA (typ.) 			



◎ Applying additive 0 ~ 10VDC

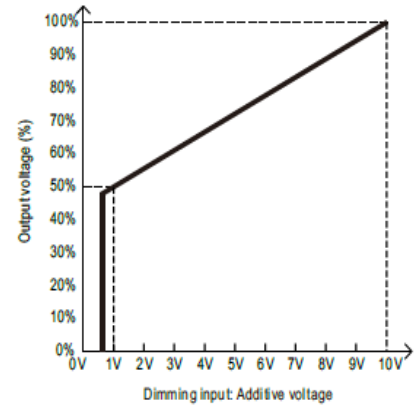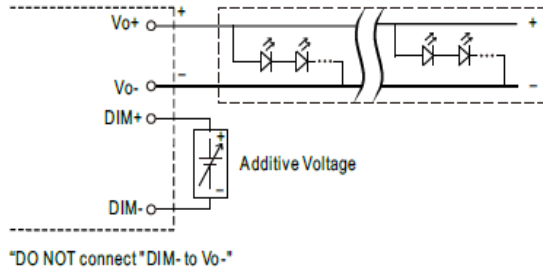

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

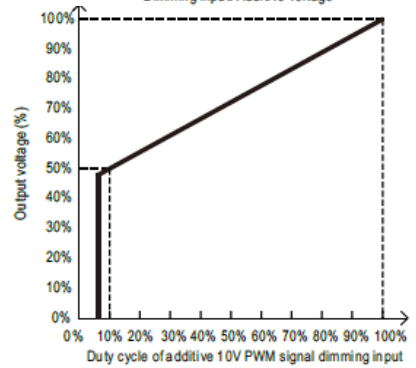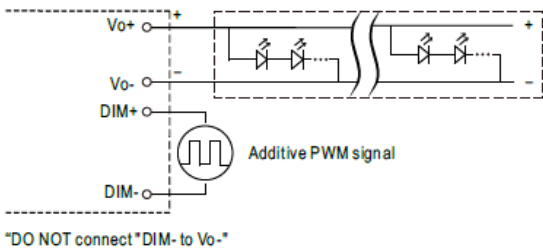

◎ Applying additive resistance:

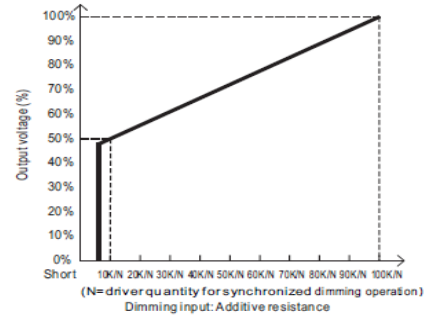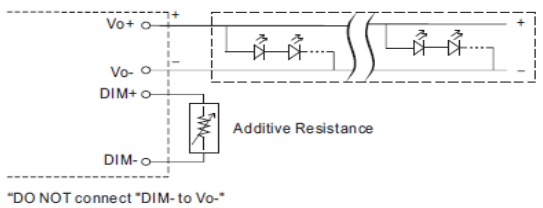

Note : 1. Min. dimming level is about 50% of output voltage and the output voltage is not defined when $V_{out} < 50\%$
 2. The output voltage could drop down to 0V when dimming input is about 0k or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P : 230 VAC O/P : DIMMING TEST


Test No.	Input	Output	SHORT	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
			1	Output Voltage	0.00000 V	21.10	23.30	25.49	27.79	30.08	32.45	34.84	37.28	39.81
	%	0.00%	50.25%	55.47%	60.68%	66.17%	71.62%	77.27%	82.96%	88.76%	94.79%	100.05%	100.19%	
2	PWM	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN	
	Output Voltage (100Hz)	0.00000 V	20.93	23.19	25.40	27.65	29.93	32.32	34.69	37.17	39.64	42.01	42.11	
	%	0.00%	49.82%	55.21%	60.48%	65.83%	71.26%	76.94%	82.60%	88.50%	94.39%	100.02%	100.26%	
3	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN	
	Output Voltage	0.00000 V	21.15	23.53	25.87	28.22	30.59	33.00	35.43	37.83	40.19	42.07	42.07	
	%	0.00%	50.35%	56.02%	61.60%	67.19%	72.83%	78.57%	84.36%	90.07%	95.69%	100.17%	100.17%	

TEST RESULT : OK

INPUT FUNCTION TEST

N O	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC~305 VAC 142VDC~431VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD (PLEASE CHECK DERATING CURVE) Ta:25°C	(1) 97V~308VAC (2) 242Vdc~431Vdc/FULL LOAD 142Vdc~431Vdc/50% LOAD (3) 242Vdc~431Vdc/FULL LOAD 142Vdc~431Vdc/50% LOAD
			I/P: LOW-LINE-3V=107 VAC HIGH-LINE+10V=315 VAC O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 110 VAC ~305VAC O/P:FULL~MIN LOAD Ta:25°C	OK
3	INPUT CURRENT (TYP)	277VAC/ 0.9A 230 VAC/ 1.1A 115 VAC/ 2.2A	I/P: 277VAC/230 VAC/115 VAC O/P:FULL LOAD Ta:25°C	I= 0.76A/277VAC I = 0.89A/ 230VAC I = 1.80A/ 115VAC
4	STANDBY POWER CONSUMPTION	<0.5W for V-type only	I/P : 230 VAC O/P : Output voltage dim to off Ta : 25°C	0.4295W
5	POWER FACTOR(TYP)	0.96/230 VAC FULL LOAD 0.97/115 VAC FULL LOAD 0.94/277 VAC FULL LOAD	I/P: 230 VAC/115VAC/277VAC O/P:FULL LOAD Ta:25°C	PF= 0.978/230V/100%LOAD PF= 0.994/115V/100%LOAD PF= 0.951/277V/100%LOAD

P.F vs LOAD

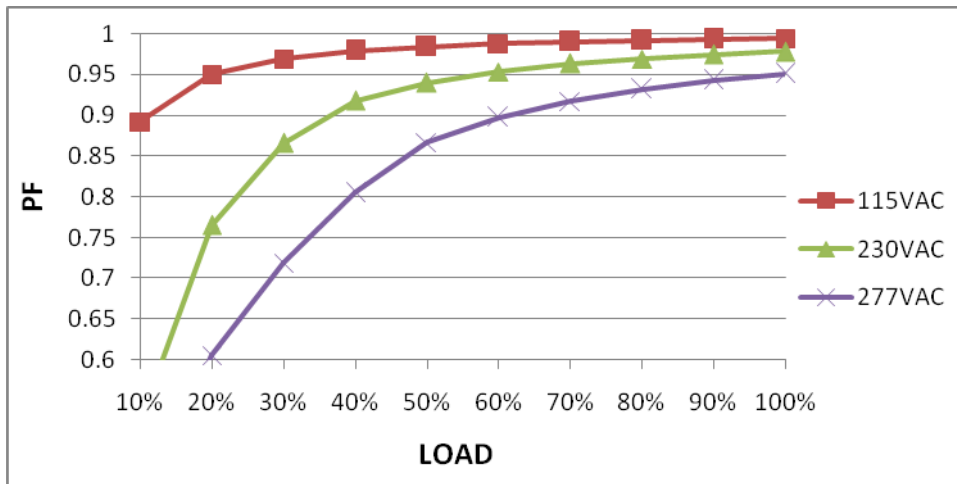

6	EFFICIENCY (TYP)	94 %	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	94.46 %																																												
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC (%)</th> <th>230VAC (%)</th> <th>277VAC (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>82</td><td>86</td><td>87</td></tr> <tr><td>20%</td><td>89</td><td>91</td><td>92</td></tr> <tr><td>30%</td><td>91</td><td>93</td><td>94</td></tr> <tr><td>40%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>50%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>60%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>70%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>80%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>90%</td><td>92</td><td>93</td><td>94</td></tr> <tr><td>100%</td><td>92</td><td>93</td><td>94</td></tr> </tbody> </table>					LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)	10%	82	86	87	20%	89	91	92	30%	91	93	94	40%	92	93	94	50%	92	93	94	60%	92	93	94	70%	92	93	94	80%	92	93	94	90%	92	93	94	100%	92	93	94
LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)																																													
10%	82	86	87																																													
20%	89	91	92																																													
30%	91	93	94																																													
40%	92	93	94																																													
50%	92	93	94																																													
60%	92	93	94																																													
70%	92	93	94																																													
80%	92	93	94																																													
90%	92	93	94																																													
100%	92	93	94																																													
7	INRUSH CURRENT (TYP)	230 V/ 65 A (twitwh=550us measured at 50% Ipeak) COLD START	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I = 50 A/ 230VAC T50= 449.8 us																																												
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : AC Input Voltage CH4 : Input current</p> <table border="1"> <caption>Inrush Current Measurement Data</caption> <thead> <tr> <th>Measurement</th> <th>Value</th> </tr> </thead> <tbody> <tr><td>600.0ns</td><td>22.00 A</td></tr> <tr><td>450.4µs</td><td>25.20 A</td></tr> <tr><td>449.8µs</td><td>3.200 A</td></tr> </tbody> </table>					Measurement	Value	600.0ns	22.00 A	450.4µs	25.20 A	449.8µs	3.200 A																																				
Measurement	Value																																															
600.0ns	22.00 A																																															
450.4µs	25.20 A																																															
449.8µs	3.200 A																																															
8	TOTAL HARMONIC DISTORTION	THD<20%(@load 60%/115VC,230VAC; @load 75%/277VAC)	I/P : 115/230VAC O/P : 60% LOAD Ta : 25°C I/P : 277VAC O/P : 75% LOAD Ta : 25°C	THD : 13.07%/ 60% Load/115VAC THD : 14.69% 60% Load/230VAC THD : 15.23%/75% Load/277VAC																																												
<p>THD vs LOAD</p> <table border="1"> <caption>THD vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC (%)</th> <th>230VAC (%)</th> <th>277VAC (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>25</td><td>25</td><td>60</td></tr> <tr><td>20%</td><td>22</td><td>20</td><td>30</td></tr> <tr><td>30%</td><td>20</td><td>18</td><td>25</td></tr> <tr><td>40%</td><td>18</td><td>16</td><td>22</td></tr> <tr><td>50%</td><td>16</td><td>15</td><td>20</td></tr> <tr><td>60%</td><td>15</td><td>14</td><td>18</td></tr> <tr><td>70%</td><td>14</td><td>13</td><td>16</td></tr> <tr><td>80%</td><td>13</td><td>12</td><td>15</td></tr> <tr><td>90%</td><td>12</td><td>11</td><td>14</td></tr> <tr><td>100%</td><td>11</td><td>10</td><td>13</td></tr> </tbody> </table>					LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)	10%	25	25	60	20%	22	20	30	30%	20	18	25	40%	18	16	22	50%	16	15	20	60%	15	14	18	70%	14	13	16	80%	13	12	15	90%	12	11	14	100%	11	10	13
LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)																																													
10%	25	25	60																																													
20%	22	20	30																																													
30%	20	18	25																																													
40%	18	16	22																																													
50%	16	15	20																																													
60%	15	14	18																																													
70%	14	13	16																																													
80%	13	12	15																																													
90%	12	11	14																																													
100%	11	10	13																																													

ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	95%~ 108%	I/P: 305VAC I/P: 230VAC I/P: 110VAC O/P:TESTING Ta:25°C	100.65%/ 305VAC 101.00%/ 230VAC 103.45%/100VAC PROTECTION TYPE : Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 46V~ 57V	I/P: 305VAC I/P: 230VAC I/P: 110VAC O/P:MIN LOAD Ta:25°C	49.14V/ 305VAC 49.16V/ 230VAC 49.18V/ 110VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 305 VAC I/P: 110 VAC O/P:FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 110 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

N O	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q73 Rated 11 A/ 600V	AC ON/OFF I/P:High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) LEDmax (9)LEDmin	VDS: (1) 460V (2) 497V (3) 460V (4) 468V (5) 480V (6) 464V (7) 497V (8) 460V (9) 456V



			<p>I/P:Low-Line -3V =107V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) LEDmax (9)LEDmin</p> <p>Ta:25°C</p>	<p>VDS: (1) 464V (2) 493V (3) 460V (4) 460V (5) 460V (6) 464V (7) 493V (8) 456V (9) 464V</p>
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 26A/ 600V	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) LEDmax (9)LEDmin</p> <p>I/P:Low-Line -3V = 107V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) LEDmax (9)LEDmin</p> <p>Ta:25°C</p>	<p>VDS: (1) 545V (2) 525V (3) 545V (4) 545V (5) 545V (6) 545V (7) 473V (8) 533V (9) 464V</p> <p>VDS: (1) 525V (2) 493V (3) 521V (4) 529V (5) 529V (6) 529V (7) 497V (8) 525V (9) 529V</p>



3	P.F.C DIODE	D5 Rated 9A/600V	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =308 V</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) LEDmax (6)LEDmin</p> <p>I/P:Low-Line -3V = 107V</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) LEDmax (6)LEDmin</p> <p>Ta:25°C</p>	<p>VDS:</p> <p>(1) 549V (2) 448V (3) 533V (4) 549V (5) 553V (6) 440V</p> <p>VDS:</p> <p>(1) 448V (2) 444V (3) 452V (4) 452V (5) 448V (6) 448V</p>
4	Diode Peak Voltage	<p>Q100 Rated 33A/ 150V</p> <p>Q101 Rated 33A/ 150V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =308 V</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) LEDmax (10)LEDmin</p> <p>Ta:25°C</p>	<p>Q100:</p> <p>VDS:</p> <p>(1) 94.6V (2) 94.6V (3) 95.4V (4) 94.6V (5) 95.4V (6) 95.4V (7) 92.2V (8) 92.2V (9) 93.8V (10) 56.8V</p> <p>Q101:</p> <p>VDS:</p> <p>(1) 93.8V (2) 93.8V (3) 93.8V (4) 94.6V (5) 94.6V (6) 93.8V (7) 91.4V (8) 91.4V (9) 93.0V (10) 55.2V</p>

5	Input Capacitor Voltage	C5 Rated: 100uF / 450 V	I/P:High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1) 442V (2) 440V (3) 448V (4) 448V
6	Control IC Voltage Test	U1 Rated - 0.3V~35V U2 Rated - 0.3V to 20V U100 Rated - 0.3V~32V	AC ON/OFF I/P:High-Line +3V =308 V FOR C.V MODE TYPE O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin.LOW LINE FOR C.C MODE TYPE O/P(6)LEDmax (7)LEDmin Ta:25°C	U1: (1) 17.8V (2) 17.8V (3) 17.6V (4) 17.2V (5) 16.8V (6) 18.2V (7) 17.4V U2 (1) 17.8 V (2) 17.4V (3) 17.4V (4) 17.2V (5) 16.2V (6) 17.8V (7) 17.6V U100 (1) 10.96V (2) 11.04V (3) 11.04V (4) 15.3V (5) 10.72V (6) 10.96V (7) 10.88V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.125 KVAC/min Ta:25°C	I/P-O/P: 1.93mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P:9999MΩ NO DAMAGE
3	LEAKAGE CURRENT	< 0.25mA / 277VAC	I/P: 277 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.051mA N-FG:0.046mA

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL : NPF-200V-48 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=25.6 °C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=50.6 °C																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=25.6 °C</th> <th>HIGH AMBIENT Ta=50.6°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>RTH1</td><td>70.1°C</td><td>85.4°C</td></tr> <tr><td>2</td><td>BD1</td><td>66.8°C</td><td>86.2°C</td></tr> <tr><td>3</td><td>Q1</td><td>67.2°C</td><td>87.0°C</td></tr> <tr><td>4</td><td>C5</td><td>64.5°C</td><td>84.2°C</td></tr> <tr><td>5</td><td>L2</td><td>65.4°C</td><td>85.1°C</td></tr> <tr><td>6</td><td>C86</td><td>66.4°C</td><td>86.4°C</td></tr> <tr><td>7</td><td>Q71</td><td>64.5°C</td><td>84.5°C</td></tr> <tr><td>8</td><td>Q73</td><td>65.0°C</td><td>85.1°C</td></tr> <tr><td>9</td><td>U1</td><td>64.2°C</td><td>84.0°C</td></tr> <tr><td>10</td><td>C36</td><td>65.0°C</td><td>85.1°C</td></tr> <tr><td>11</td><td>T1</td><td>71.8°C</td><td>92.1°C</td></tr> <tr><td>12</td><td>C106</td><td>53.8°C</td><td>75.2°C</td></tr> <tr><td>13</td><td>Q100</td><td>56.4°C</td><td>78.1°C</td></tr> <tr><td>14</td><td>Q101</td><td>61.5°C</td><td>83.5°C</td></tr> <tr><td>15</td><td>D5</td><td>69.4°C</td><td>89.1°C</td></tr> <tr><td>16</td><td>U101</td><td>62.3°C</td><td>83.5°C</td></tr> <tr><td>17</td><td>TC</td><td>54.3°C</td><td>73.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=25.6 °C	HIGH AMBIENT Ta=50.6°C	1	RTH1	70.1°C	85.4°C	2	BD1	66.8°C	86.2°C	3	Q1	67.2°C	87.0°C	4	C5	64.5°C	84.2°C	5	L2	65.4°C	85.1°C	6	C86	66.4°C	86.4°C	7	Q71	64.5°C	84.5°C	8	Q73	65.0°C	85.1°C	9	U1	64.2°C	84.0°C	10	C36	65.0°C	85.1°C	11	T1	71.8°C	92.1°C	12	C106	53.8°C	75.2°C	13	Q100	56.4°C	78.1°C	14	Q101	61.5°C	83.5°C	15	D5	69.4°C	89.1°C	16	U101	62.3°C	83.5°C	17	TC	54.3°C	73.9°C
NO	Position	ROOM AMBIENT Ta=25.6 °C	HIGH AMBIENT Ta=50.6°C																																																																									
1	RTH1	70.1°C	85.4°C																																																																									
2	BD1	66.8°C	86.2°C																																																																									
3	Q1	67.2°C	87.0°C																																																																									
4	C5	64.5°C	84.2°C																																																																									
5	L2	65.4°C	85.1°C																																																																									
6	C86	66.4°C	86.4°C																																																																									
7	Q71	64.5°C	84.5°C																																																																									
8	Q73	65.0°C	85.1°C																																																																									
9	U1	64.2°C	84.0°C																																																																									
10	C36	65.0°C	85.1°C																																																																									
11	T1	71.8°C	92.1°C																																																																									
12	C106	53.8°C	75.2°C																																																																									
13	Q100	56.4°C	78.1°C																																																																									
14	Q101	61.5°C	83.5°C																																																																									
15	D5	69.4°C	89.1°C																																																																									
16	U101	62.3°C	83.5°C																																																																									
17	TC	54.3°C	73.9°C																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 102.6 %LOAD Ta : 25°C	TEST : OK																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/110VAC O/P : FULL LOAD Ta= -45/-30 °C	TEST : OK																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE	I/P : 305 VAC O/P : FULL LOAD Ta= 45 °C HUMIDITY= 95 %R.H	TEST : OK																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/(0°C~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0008 %/°C(0~50°C)																																																																								
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10CYCLE 5. Input/Output condition : STATIC																																																																									



7	THERMAL SHOCK TEST	-40~45°C	1. Thermal shock Temperature : -45°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=45 °C LIFE TIME	(1) 520069HRS (2) 166867HRS (3) 277193HRS (4) 310931 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2625.4K hrs min. Telcordia SR-332 (Bellcore); 247.5K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/HUANGMK	WENF	LINKX

2018.4.30

GP-A50-F010