



Test Report: RQ-65D

65W Quad Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.75V~ 5.5 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	4.59V~5.72V/230VAC 4.59V~5.72V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1 : -2%~2 % V2 : -10%~6 % V3 : -10%~6 % V4 : -5%~5 %	I/P: 88VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1 : -0.05%~0.05% V2 : -0.49%~1.7% V3 : -1.01%~3.17% V4 : -0.22%~0.21%
3	LINE REGULATION (Max)	V1: -0.5%~0.5% V2: -1.5%~ 1.5% V3: -2%~2% V4: -0.5%~ 0.5%	I/P: 88VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1 : -0.01%~0.01% V2 : -0.04%~0.14% V3 : -0.02%~0.37% V4 : -0.01%~0.01%
4	LOAD REGULATION(Max)	V1: -0.5%~0.5% V2: -3%~3% V3: -5%~5% V4: -1%~1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1 : -0.05%~0.05% V2 : -0.49%~1.7% V3 : -1.01%~3.17% V4 : -0.22%~0.21%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	1.2%
6	RIPPLE & NOISE(Max)	V1: 80mVp-p V2: 120mVp-p V3: 180mVp-p V4: 80mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 21mVp-p V2: 26mVp-p V3: 39mVp-p V4: 26mVp-p


high frequency (V1) :

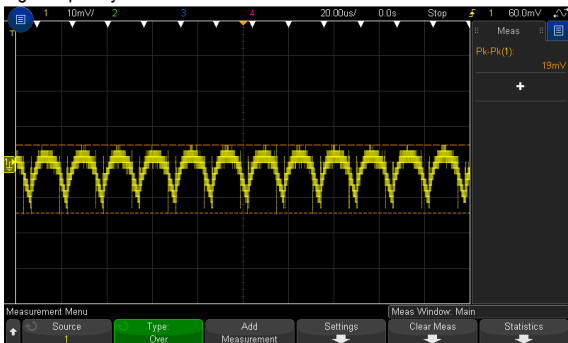


low frequency (V1) :

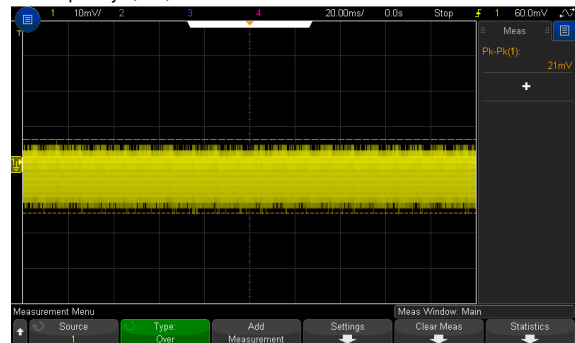

high frequency (V2) :


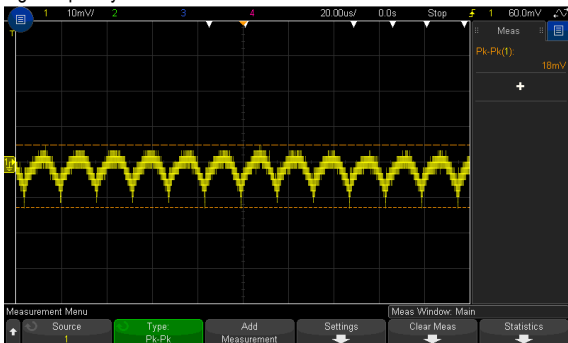


low frequency (V2) :






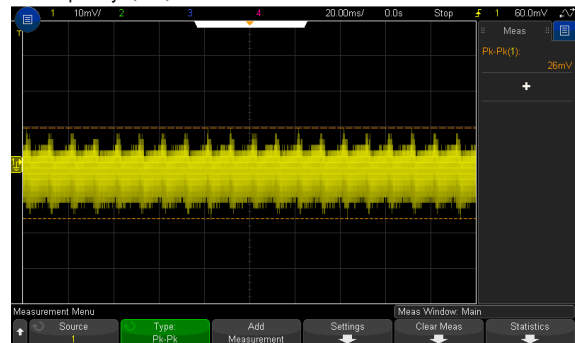



<p>high frequency (V3) :</p>	<p>low frequency (V3) :</p>		
<p>high frequency (V4) :</p>	<p>low frequency (V4) :</p>		
<p>7 SET UP TIME(Max)</p>	<p>230VAC/500ms 115VAC/1200ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 148.8 ms 115VAC/ 147.8ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	<p>8 RISE TIME (Max)</p>	<p>230VAC/20ms 115VAC/30ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p>	<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 9.13ms 115VAC/ 10.19ms</p>

9	HOLD UP TIME (Typ.)	230VAC/60ms	I/P : 230 VAC	230VAC/ 82ms
		115VAC/14ms	I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	115VAC/ 15ms

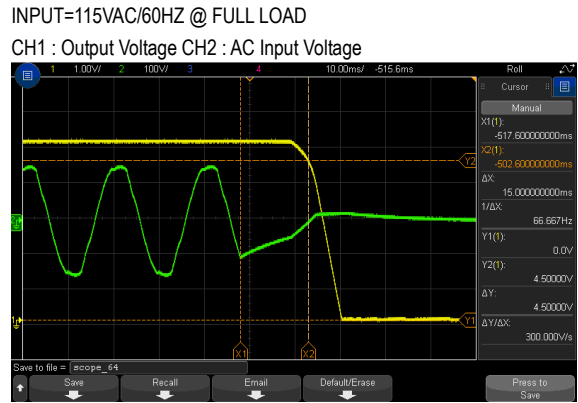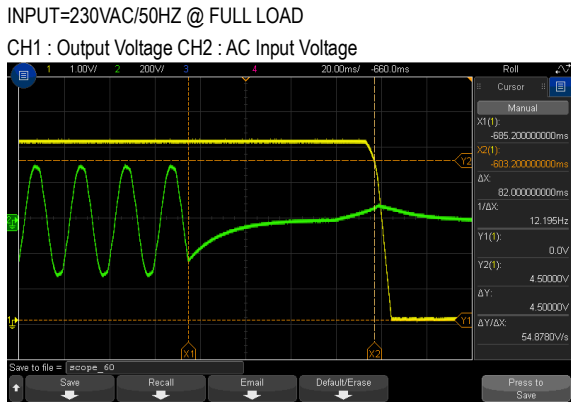

10	DYNAMIC LOAD	V1: 1000 mVp-p V2: 1200 mVp-p V3: 2400 mVp-p V4: 1200 mVp-p	I/P: 230VAC	(1)	(2)
			O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	V1: 140mVp-p V2: 320mVp-p V3: 1050mVp-p V4: 50mVp-p	116mVp-p 185mVp-p 507mVp-p 48mVp-p

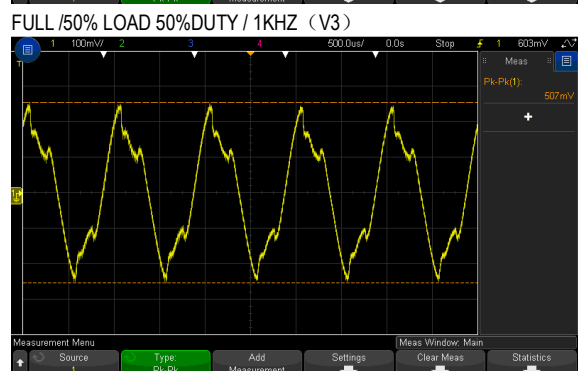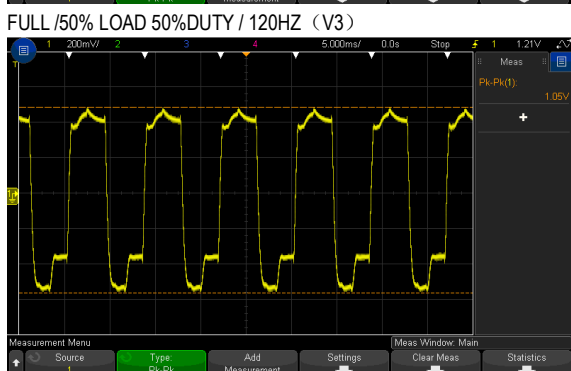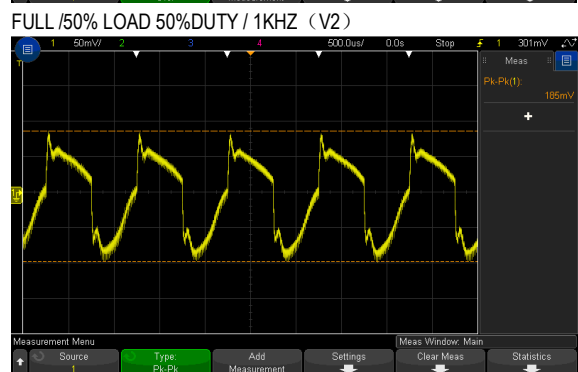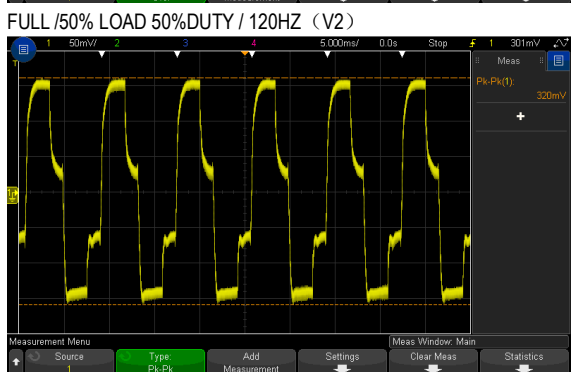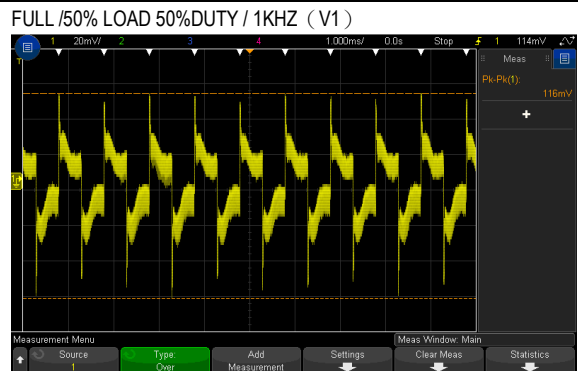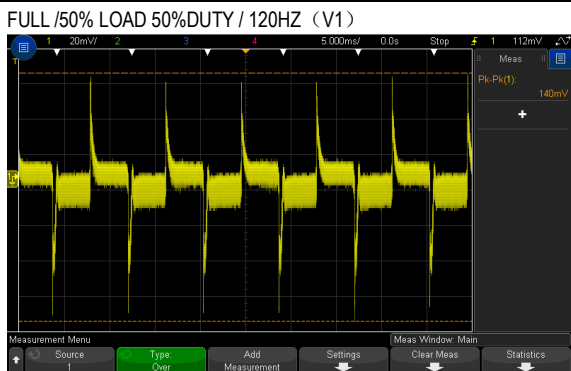


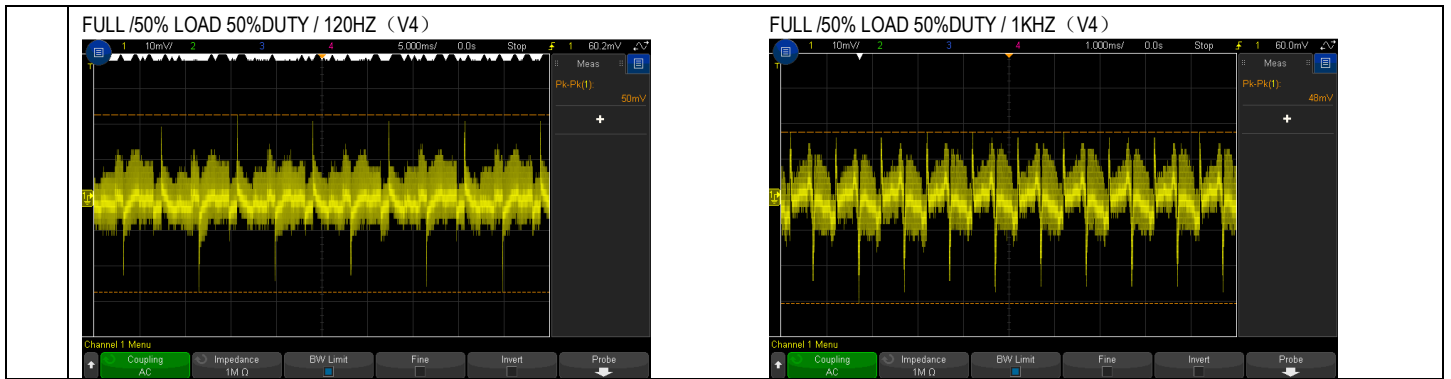


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	88VAC~264VAC 125VDC ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage)	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL LOAD Ta:25°C	(1) 78V~264V (2) 112.85Vdc~373Vdc/FULL LOAD (3) 112.85Vdc~373Vdc/FULL LOAD
			I/P: LOW-LINE-3V=85 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:88 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.2A 115V/ 2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=1.12A/ 230VAC I=1.81A/ 115VAC
4	LEAKAGE CURRENT	<2 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	0.5mA
5	EFFICIENCY(Typ.)	77%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	78%

EFFICIENCY vs LOAD

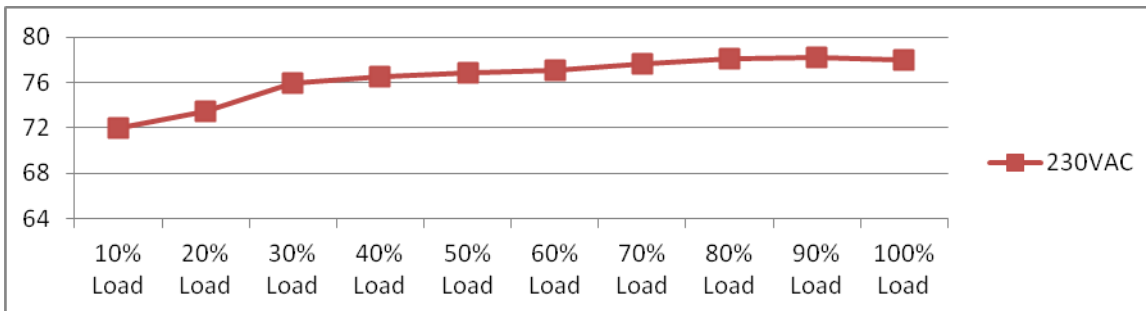

6	INRUSH CURRENT(Typ.)	230V / 50A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	41.4A
---	----------------------	--------------------------	---	-------

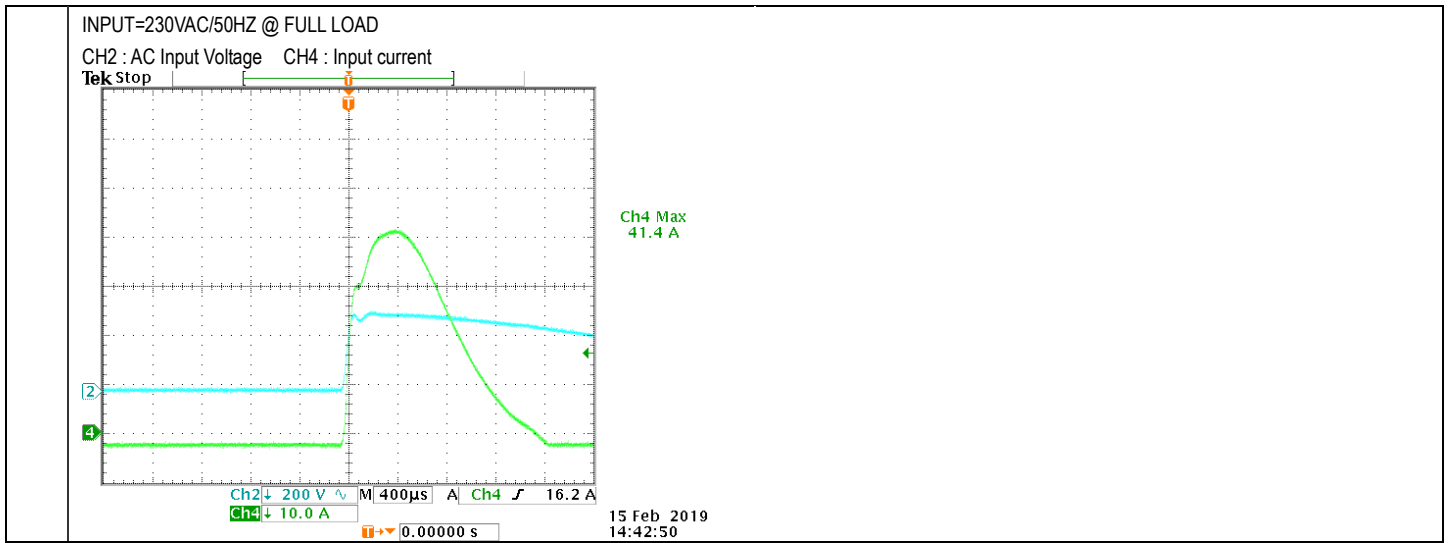

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~150%	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	119.4%/ 264VAC 122.5%/ 230VAC 115.2%/115VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	5.75V~6.75V	I/P: 264VAC I/P: 230VAC I/P: 88VAC O/P: MIN LOAD Ta:25°C	5.97V/ 264VAC 5.97V/ 230VAC 5.97V/ 88VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 88VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 600 V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 556V (2) 547V (3) 556V
2	O/P Diode	D50 Rated : 200 V D55 Rated : 100 V D56 Rated : 400 V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta:25°C	D50 D55 (1) 93.5V (1) 54.1V (2) 94.3V (2) 53.3V (3) 50.9V (3) 42.8V D56 D58

		D58 Rated : 400 V		(1) 276V (2) 248V (3) 161V	(1) 224V (2) 212V (3) 119V
3	Input Capacitor Voltage	C5 Rated :150 μ / 400 V	I/P:High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1) 395V (2) 391V (3) 379V (4) 375 V	
4	Control IC Voltage Test	U1 Rated : 7.2V~ 16 V	AC ON/OFF I/P:High-Line +3V =267 V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(LOW LINE) Ta:25°C	(1) 12.9V (2) 12.9V (3) 12.9V (4) 12.9V (5) 12.9V	
5	Clamp Diode Peak Voltage	D1 Rated : 600 V	AC ON/OFF I/P : High-Line +3V = 267 V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1) 524V (2) 512V	

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2 KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P- FG: 2.4 KVAC/min O/P - FG: 0.6 KVAC/min Ta:25°C	I/P-O/P:2.97mA I/P-FG:1.18mA O/P-FG:0.88mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P- FG:500VDC>100M Ω O/P- FG:500VDC>100M Ω	I/P-O/P: 600 VDC I/P- FG: 600 VDC O/P - FG: 600 VDC Ta:25°C	I/P-O/P: 9999M Ω I/P-FG: 9999M Ω O/P-FG: 9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40 A / 2min Ta: 25°C/70%RH	4m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab

4	E.S.D	EN61000-4-2 <input type="checkbox"/> LIGHT INDUSTRY AIR: 8KV / Contact: 4KV <input checked="" type="checkbox"/> INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 <input checked="" type="checkbox"/> INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L/N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL : RQ-65D 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 27.4 °C 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 40.0°C																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.4 °C</th> <th>HIGH AMBIENT Ta=40.0 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>58.4°C</td><td>72.3°C</td></tr> <tr><td>2</td><td>LF1</td><td>54.4°C</td><td>69.5°C</td></tr> <tr><td>3</td><td>C5</td><td>52.9°C</td><td>67.5°C</td></tr> <tr><td>4</td><td>Q1</td><td>89.9°C</td><td>104.3°C</td></tr> <tr><td>5</td><td>U1</td><td>72.7°C</td><td>85.4°C</td></tr> <tr><td>6</td><td>D1</td><td>74.0°C</td><td>87.1°C</td></tr> <tr><td>7</td><td>T1coil</td><td>90.7°C</td><td>104.8°C</td></tr> <tr><td>8</td><td>T1core</td><td>93.3°C</td><td>106.6°C</td></tr> <tr><td>9</td><td>D55</td><td>103.8°C</td><td>116.0°C</td></tr> <tr><td>10</td><td>D50</td><td>97.1°C</td><td>110.2°C</td></tr> <tr><td>11</td><td>D58</td><td>109.2°C</td><td>116.9°C</td></tr> <tr><td>12</td><td>C56</td><td>72.9°C</td><td>85.1°C</td></tr> <tr><td>13</td><td>RG2</td><td>95.3°C</td><td>107.9°C</td></tr> <tr><td>14</td><td>C63</td><td>78.2°C</td><td>91.1°C</td></tr> <tr><td>15</td><td>D56</td><td>107.7°C</td><td>118.1°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.4 °C	HIGH AMBIENT Ta=40.0 °C	1	BD1	58.4°C	72.3°C	2	LF1	54.4°C	69.5°C	3	C5	52.9°C	67.5°C	4	Q1	89.9°C	104.3°C	5	U1	72.7°C	85.4°C	6	D1	74.0°C	87.1°C	7	T1coil	90.7°C	104.8°C	8	T1core	93.3°C	106.6°C	9	D55	103.8°C	116.0°C	10	D50	97.1°C	110.2°C	11	D58	109.2°C	116.9°C	12	C56	72.9°C	85.1°C	13	RG2	95.3°C	107.9°C	14	C63	78.2°C	91.1°C	15	D56	107.7°C	118.1°C
NO	Position	ROOM AMBIENT Ta= 27.4 °C	HIGH AMBIENT Ta=40.0 °C																																																																	
1	BD1	58.4°C	72.3°C																																																																	
2	LF1	54.4°C	69.5°C																																																																	
3	C5	52.9°C	67.5°C																																																																	
4	Q1	89.9°C	104.3°C																																																																	
5	U1	72.7°C	85.4°C																																																																	
6	D1	74.0°C	87.1°C																																																																	
7	T1coil	90.7°C	104.8°C																																																																	
8	T1core	93.3°C	106.6°C																																																																	
9	D55	103.8°C	116.0°C																																																																	
10	D50	97.1°C	110.2°C																																																																	
11	D58	109.2°C	116.9°C																																																																	
12	C56	72.9°C	85.1°C																																																																	
13	RG2	95.3°C	107.9°C																																																																	
14	C63	78.2°C	91.1°C																																																																	
15	D56	107.7°C	118.1°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 122% LOAD Ta : 25°C	TEST : OK																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/115VAC O/P : 100 % LOAD Ta= -25°C	TEST : OK																																																																



4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL40°C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta=40 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03%/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0046%/°C (0~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test		TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C56 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=40 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 40 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 40 °C LIFE TIME		(1) 145806.2HRS (2) 26546.6HRS (3) 48020HRS (4) 79006.2HRS
10	MTBF	2466.8K hrs min. Telcordia SR-332 (Bellcore) ; 424.2K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		Wangdz

2018.4.30 GP-A50-F010